



To

M/S GET TECHNOLOGIES (PVT) Ltd.,
Lahore (Pakistan).

Subject: Work / Supply Order (Amounting to Rs. 2,60,00,000/-)
Installation of Flood Lights at Bhimber, Muzaffarabad &
Rawalakot Stadium (Only for Khurshid ul Hassan Khurshid
Football Stadium Muzaffarabad).

Reference is made to the following:

1. Newspaper advertisement published in the Local / National dailies inviting bids for the Supply & Installation of Flood Lights at Khurshid ul Hassan Khurshid Football Stadium Muzaffarabad.
2. Your bid submitted to department of Sports, Youth & Culture in response to the above advertisement.
3. The letter of Acceptance dated 12-05-2022 issued by this department and acceptance of offer from your side.

We are pleased to inform you that your bid amounting to Rs. 26000000/- (Twenty-Six Million) submitted for the Supply & Installation of Flood Lights for Khurshid ul Hassan Khurshid Football Stadium Muzaffarabad has been approved by the Departmental Purchase Committee, under PPRA directions. Therefore, in compliance of decision of the Departmental Purchase Committee, the Supply / Work Order is placed for supply / installation of below item(s) with terms and conditions elaborated herewith:

S#	Description	Qty	Unit Rate (Rs.)	Total Amount (Rs.)	Name of Project	Place
01	<u>Stadium Pole and Installation</u> Supply & installation of 18 Mtr high Hot Dip Galvanized Fix Type Polygonal Stadium High Mast having bottom dia 457mm with 6mm wall thickness, top dia 300m with 4mm wall thickness with fixed type head frame structure suitable for 180 Km/hrs wind speed. Mast shall be suitable to carry 4-6 Nos. of 850-1000W LED Stadium light luminaries fittings to illuminate Football Ground as per the light levels (Leagues and clubs).	06 Nos.	1300000/-	7800000/-	Installation of Flood Lights at Bhimber, Muzaffarabad & Rawalakot Stadium.	Muzaffarabad


Basit
26/05/22

P1-4

	<p>The mast should include proper stepped ladder including safety cage and working platform to access the light fixtures with foundation anchor J-bolts having 32mm dia 8 Nos. for each pole manufactured from special steel along with nuts, washers and anchor base plate having size 675x675x30mm thick with stiffener plate 250x75x10mm thick. Complete in all respect as per drawings, specifications and as directed by the Engineering Incharge.</p>					
02	<p>LED Flood Light and installation Supply & Installation of high quality LED Flood light 850-1000 Watt with a minimum system lumen output 90000 lumen and a system efficacy of 120 lumen/watt. The Luminaire shall have a rated system mean lifetime of 50000 burning hour @ L70. Correlated Color Temperature (CCT) of Luminaire should not be less than 5000K and Color Rendering Index (CRI) should not be less than 70. The luminaire shall have a IP66 rating and IK08 along with the surge protection having a provision of protection upto 10kV/KA. SPD should be able to sustain a minimum 15 hits of 10KA rating. The power factor should be greater than or equal to 0.95 and THD < 20%. Light distribution of luminaire should be of symmetric wide beam and optics should be anti-dust exposed lenses. The driver should be fully integrated with efficiency of more than 85%. The luminaire should be able to operate at an ambient of (-) 10 deg C to (+) 45deg C ambient. The maintenance factor consider during lux level calculation should be 0.9. The LED used in the luminaire shall be SMD type of reputed manufacturer like Philips, Get Technologies, GE or equivalent.</p>	24 Nos.	9480000/-	9960000/-	Installation of Flood Lights at Bhimber, Muzaffarabad & Rawalakot Stadium.	Muzaffarabad

Handwritten signature
26/05

S#	Description	Qty	Unit Rate (Rs.)	Total Amount (Rs.)	Name of Project	Place
04	Supply & installation 1 kV grade insulated and overall sheathed stranded aluminum conductor, flat steel strip armored cable from Pakistan Cable, fast Cable, GM Cable or equivalent of sizes. 4C x 35 sq. mm.	500 Mtr	6280/-	3140000/-	Installation of Flood Lights at Bhimber, Muzaffarabad & Rawalakot Stadium.	Muzaffarabad
	Supply & installation 2C x 4mm copper cable in lighting pole for flood light luminaire from Pakistan Cable, fast Cable, GM Cable or equivalent.	600 Mtr	510/-	306000/-	Installation of Flood Lights at Bhimber, Muzaffarabad & Rawalakot Stadium.	Muzaffarabad
	Supply & installation LT Outdoor type distribution panel suitable for operation on 415+10% volts, 50Hz AC 3ph 4wire system, cubicle & modular type, made of 2mm thick sheet steel for frame work and covers, 3mm thick for gland plates, totally enclosed, minimum IP 55 protection, dust & vermin proof free floor mounting with powder coating complete with Aluminum bus bars, interconnection with copper conductor, aluminum strip, neutral link, earth bus etc with following Incomming:- 1No, 63A 4P, 25kA, MCCB having with inbuilt O/C, S/C, E/F protection, ON/OFF/TRIP indicating lamps- 1sets, Phase indicating lamps-1sets, Digital combined multifunction meter with relevant CT's of class 8No. Outgoing Breaker:- 6A 1pole.	6 Nos.	256000/-	1536000/-	Installation of Flood Lights at Bhimber, Muzaffarabad & Rawalakot Stadium.	Muzaffarabad
	Supply & installation 50KVA, Seimen/ Perkins/Cummins or equivalent Diesel Generator with fuel tank and canopy. Complete in all respect as per specifications and as directed by engineering incharge.	1 No.	3258000/-	3258000/-	Installation of Flood Lights at Bhimber, Muzaffarabad & Rawalakot Stadium.	Muzaffarabad

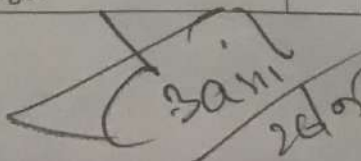

 Sami

 24/05

 P-3-4

Terms & Condition:

- i. Contract agreement shall be signed within in seven days of issuance of this work / supply order and acceptance of performance security. Joint visit shall be convened for site layout within seven (07) days of issuance of this work / supply order.
- ii. All applicable taxes will be deducted from your bill as per Government rules.
- iii. The supply items shall be according to the laid down specifications.
- iv. The Technical Committee will examine the supply items and payment shall be made when the Technical Committee shall approve supply items.
- v. In case if supply items are not according to the specifications, then the supply items shall be rejected and the firm shall be responsible to replace supply items at his own expense.
- vi. Firm shall submit test report of LED Flood Lights from UET Lahore before its installation.
- vii. After complete installation of LED Flood Lights and Pole, expert Electrical Engineer from UET Lahore will check and verify the installation.
- viii. Installation shall be made within **90 days** positively from the date of placing order. However earlier supply / installation at site will be appreciated.
- ix. Payment shall be made after the approval of supply / installation of items.
- x. The Guarantee period shall be 01 year and the department will retain your CDR / Bank Guarantee for 01 year.


Deputy Director (Technical)
Sports, Youth & Culture

DG/SYC/ 2407-13 /22

Date: 26 / 05 / 2022

Copy to:

01. PS to the Secretary Sports, Youth & Culture, GoAJ&K.
02. The Accountant General, GoAJ&K.
03. The Director General Sports, Youth & Culture (Chairman Departmental Purchase Committee), GoAJ&K.
- ✓ 04. The Deputy Director PPRA, Muzaffarabad.
05. The Deputy Director /DDO Sports, Youth & Culture, Muzaffarabad.
06. Accountant Sports, Youth & Culture, Muzaffarabad.
07. Master File.

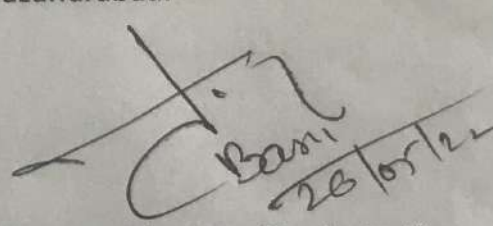
Deputy Director (Technical)